


PMB3022ADC(24V)

1	额定电压 Rated Voltage (V DC)	24V
2	工作电压 Operating Voltage (V DC)	6-24V
3	工作电流 Rated Current (mA)	30-50mA
4	谐振频率 Resonant Frequency (KHZ)	2.8±0.3 HZ
5	声响分贝 Sound Output at 10cm (dB)	108-114dB
6	声音 voice	嘀嘀声
7	塑壳材料/颜色 Shell Material/Color	ABS/黑色
8	工作温度 Operating Temperature (℃)	-20 ~ +70℃
9	贮存温度 Store Temperature (℃)	-30 ~ +80℃
10	重量 Weight (g)	42

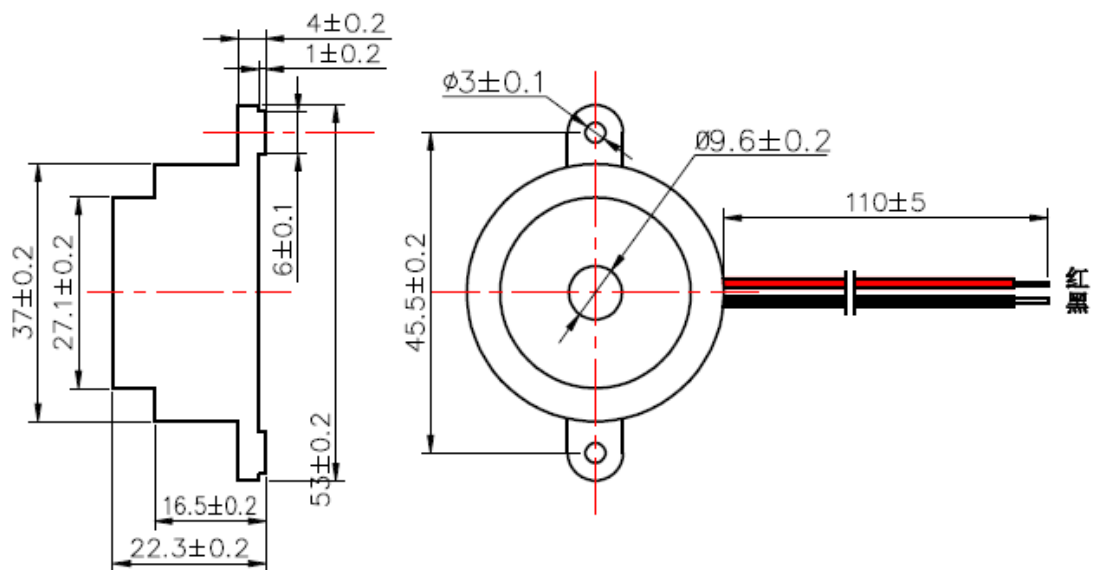

피엠비일렉텍: 서울시구로구 경인로 53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbeco.kr