


## PMB3022KDC(12V)

|    |                                |            |
|----|--------------------------------|------------|
| 1  | 额定电压 Rated Voltage (V DC)      | 12V        |
| 2  | 工作电压 Operating Voltage (V DC)  | 6-15V      |
| 3  | 工作电流 Rated Current (mA)        | 30-50mA    |
| 4  | 谐振频率 Resonant Frequency (KHZ)  | 2.8±0.5 HZ |
| 5  | 声响分贝 Sound Output at 10cm (dB) | 108-114dB  |
| 6  | 声音 voice                       | 报警声        |
| 7  | 塑壳材料/颜色 Shell Material/Color   | ABS/黑色     |
| 8  | 工作温度 Operating Temperature (℃) | -20 ~ +70℃ |
| 9  | 贮存温度 Store Temperature (℃)     | -30 ~ +80℃ |
| 10 | 重量 Weight (g)                  | 42         |

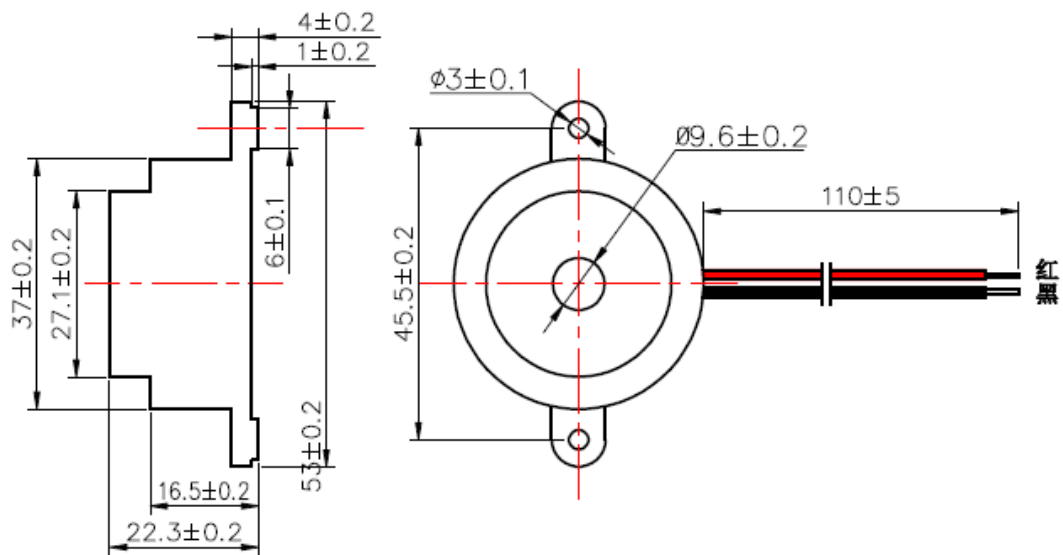

피엠비일렉텍: 서울시구로구 경인로 53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbe.co.kr