



PMB1605

TYPE	UNIT	PMB1605
◆Min. Sound Output at 10cm	dB	85
Rated Voltage	V _{0-p}	5
Operating Voltage	V _{0-p}	4~8
Resonant Frequency	Hz	2048
◆Max. Current Consumption	mA	40
Coil Resistance	Ω	50±5
◇Coil Impedance	Ω	110
Operating Temperature	°C	-20~+70
Storage Temperature	°C	-30~+80
Weight	g	7

- ◆ Value applying at (rated voltage, 2048Hz, 1/2 duty square wave)
◇ Value applying at (2048Hz, sine wave, measuring current 60μA)

DIMENSIONS :
(Unit: mm)

FREQUENCY RESPONSE:

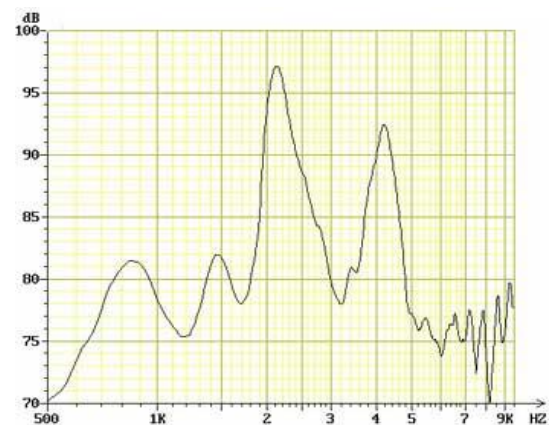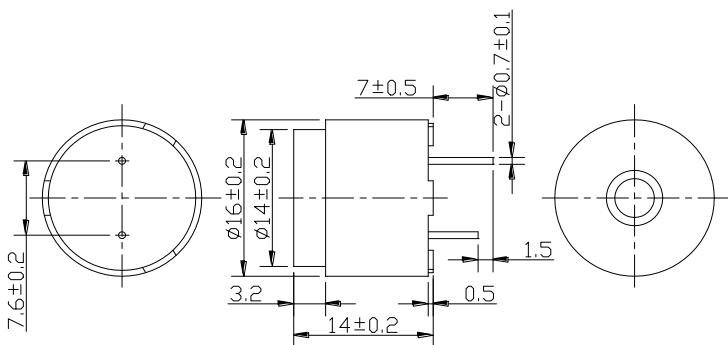

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbeco.kr