


## PMB-471L(12V)


| TYPE                       | UNIT | PMB-471L   |
|----------------------------|------|------------|
| ◆Min. Sound Output at 30cm | dB   | 90         |
| Rated Voltage              | VDC  | 12         |
| Operating Voltage          | VDC  | 3 ~ 20     |
| Resonant frequency         | Hz   | 3900±500   |
| ◆Max. Current Consumption  | mA   | 15         |
| Tone Nature                |      | Continuous |
| Operating Temperature      | ℃    | -20 ~ +70  |
| Storage Temperature        | ℃    | -30 ~ +80  |
| Weight                     | g    | 8          |

◆ Value applying at rated voltage

### DIMENSIONS(UNIT:mm)

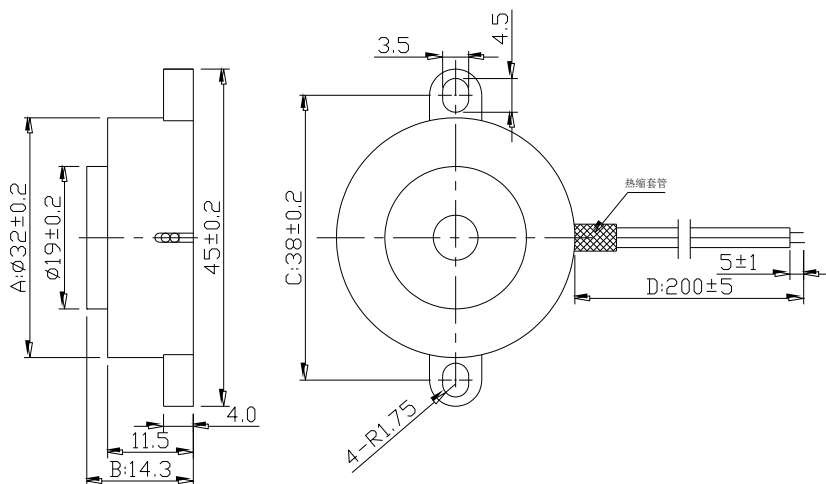

### CHARACTERISTIC::

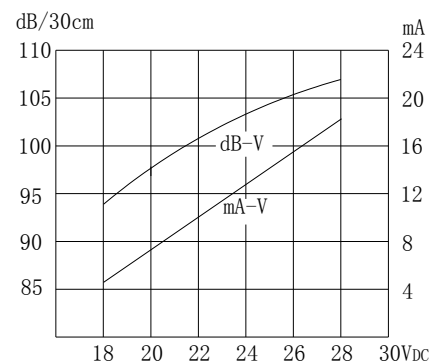

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbe.co.kr