

REV:01

ROHS

SPECIFICATION OF PRODUCT

産品承認書

CUSTOMER: _____

DESCRIPTION : SPEAKER

CHENGXUN P/N: PMB70205-R08W2.0-N12M-G

CUSTOMER P/N: _____

CUSTOMER	APPROVER	CHECKER

PMB

상표등록 <제40-0729433호>

피엠비일렉텍

PMB ELECTECH

서울시 구로구 경인로53가길 10 대명벨리온 904호

TEL : (02)2619-0388 FAX : (02)2619-0346

HOME PAGE: <http://www.pmbe.co.kr> E-MAIL : pmbe@pmbe.co.kr



C O N T E N T S

※ CONDITION.	
-----	1
※ ELECTRICAL AND ACOUSTICAL SPECIFICATION.	
-----	2
※ MEASURING METHOD	
-----	3
※ FREQUENCY RESPONSE	
-----	4
※ ENVIRONMENT TEST	
-----	5
※ DIMENSIONS	
-----	6

Specification for speaker

1. CONDITION.

Test and measurement will be carried out under normal condition of temperature within 5°C to 35°C, relative humidity within 45% to 85% and air pressure of 860 mbar to 1060 mbar.

Should uncertainly arise in data obtained from the above atmosphere, control of temperature at $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and relative humidity within 60% and 70%, with air pressure remaining unchanged, to be enforced.

2. ELECTRICAL AND ACOUSTICAL SPECIFICATION.

2-1	Rated Input Power.	2.0W.
2-2	Max Input Power.	2.5 W
2-3	Rated Impedance.	8 \pm 15%
2-4	Sound Pressure Level. (S.P.L)	88 \pm 3 dB (0.1W/0.1m) at AVE 0.6K 0.8K 1.0K 1.2K Hz
2-5	Resonance Frequency (Fo).	360\pm20%Hz
2-6	Frequency Range.	F0~9kHz.
2-7	Distortion	Less than 5% at 1KHz input 0.1W /0.1m
2-8	Magnet	Rare earth permanent (NdFeB) magnet Φ 12.5*2.0 mm
2-9	Buzz, Rattle, etc.	Should not be audible at 4.0V sine Wave between Fo to 10KHz
2-10	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.
2-11	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.
2-12	Weight	35g
2-13	Temperature	Operating temperature: -30°C to +70°C Storage temperature: -40°C to +85°C

Specification for speaker

3. MEASURING METHOD

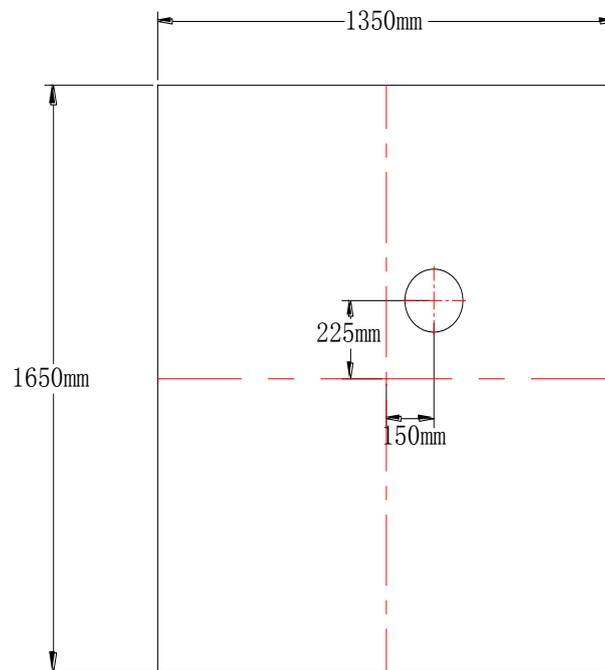


FIG. 1

3. 1Block Diagram For Measurement Method.

Standard test condition of speaker

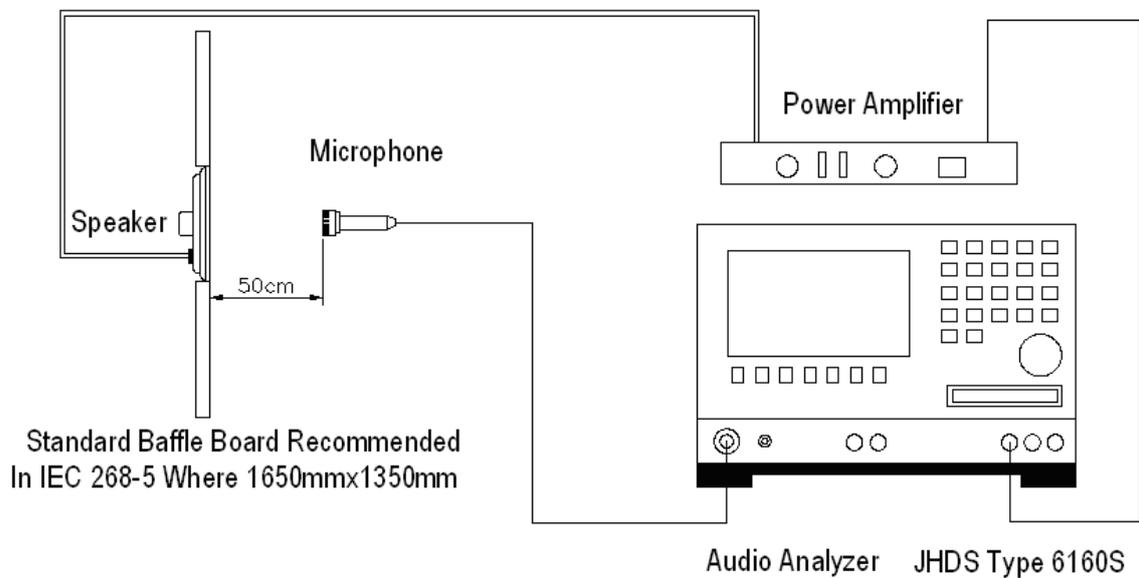


FIG. 2

Specification for speaker

4. Frequency Response :

The swept sine-wave frequency response of a Loud speaker should ideally not deviate more than indicated per Fig.3

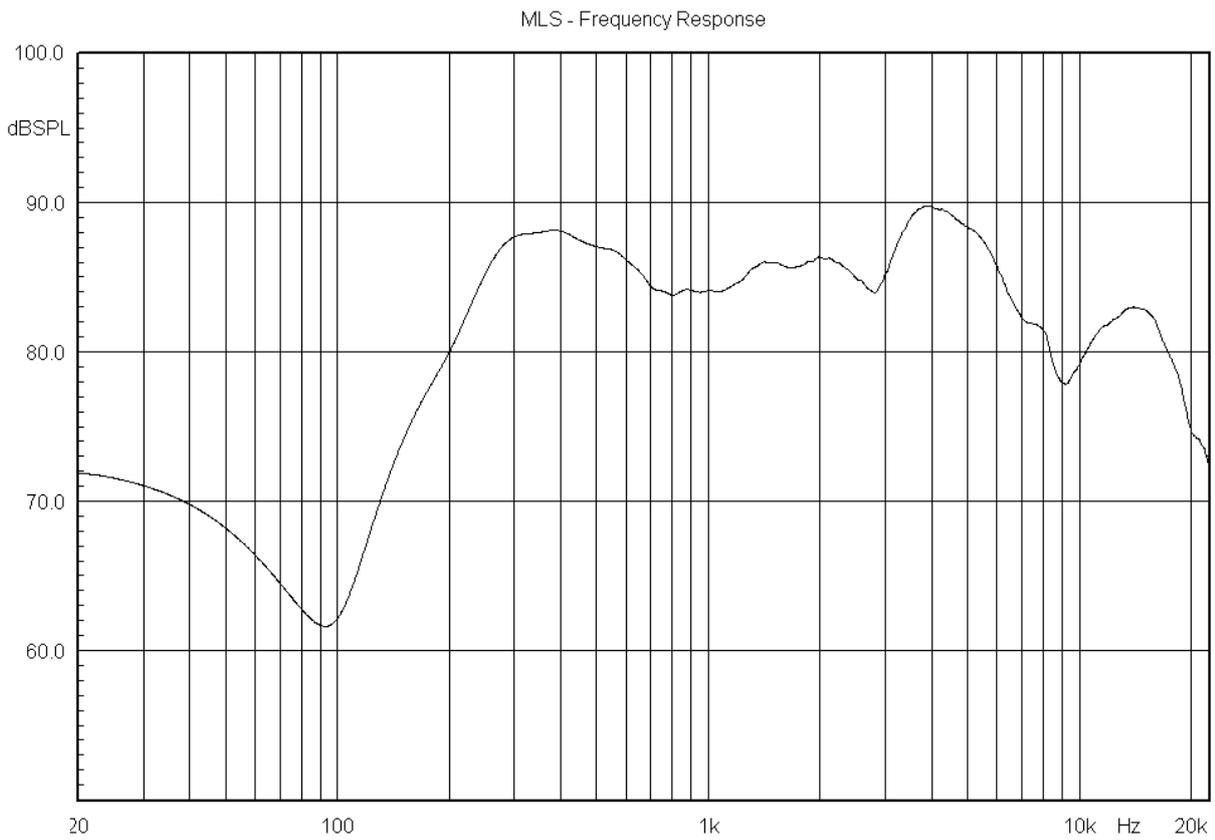


FIG. 3

Specification for speaker

5. ENVIRONMENT TEST


ITEM		SPECIFICATIONS
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 6 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 6 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 92-95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	<p>The part shall be subjected 5 cycles. One cycle shall be 6 hours and consist of;</p> <p style="text-align: center;"> 65°C $90 \sim 95 \% \text{ RH}$ 25°C 0.5hr 6hrs 0.5hr 5hrs </p>
05	Vibration	10~55~10Hz sin-wave sweep 15min. 5G(constant) X, Y, Z 3 direction. 2 hours each, total 6 hours.
06	drop test	Drop the speakers contained in normal box onto the board 40mm thick 10 times from the height of 75cm
07	Load test	Rate Power Pink noise is applied for 24 hours at room temp
08	Lead Wire Pull Strength	The pull force shall be applied to double lead wire : Horizontal 3.0N(0.306kg) for 30 seconds. Vertical 2.0N(0.204kg) for 30 seconds.

Criterion :

After these test , the change of S.P.L shall be within $\pm 3 \text{ dB}$

Specification for speaker

6. Dimensions

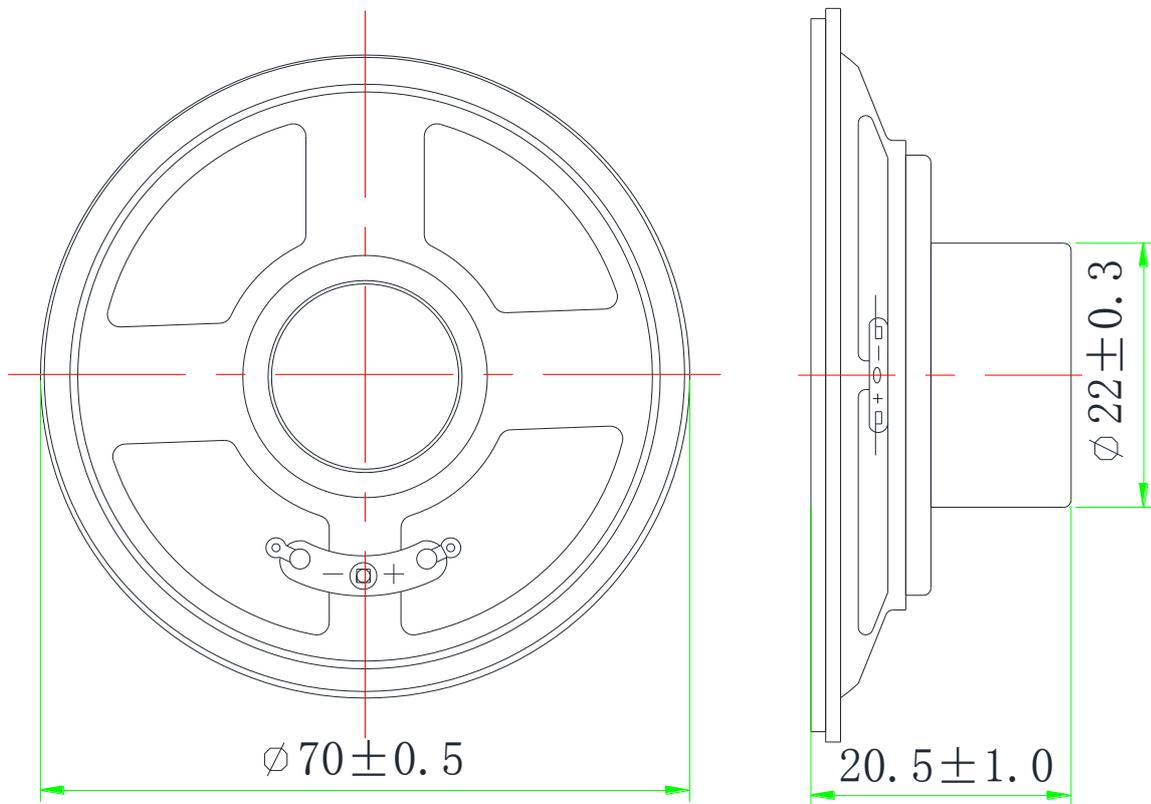

Unit:mm Tol:±0.5

8	GASKET	1	Paper	
7	Diaphragm	1	Pet	
6	VOICE COIL	1	Paper+ Cu	
5	Damper	1	Cloth	
4	Plate	1	SPCC	
3	Magnet	1	NdFeB	
2	PCB Terminal	1	Paper Cu	
1	Frame	1	SPCC	

The material must be meet to GU-001

PART NO.	PART NAME	Q'TY	MATERIAL	REMARK
----------	-----------	------	----------	--------