


PMB51PCB


TYPE	PMB51PCB
◆Min. Sound Pressure Level(dB)	85/4.0KHz;9Vp-p;square wave/10cm
Rated Voltage(Vp-p)	9
Operating Voltage(Vp-p)	1 ~ 30
◆Resonant frequency (KHz)	4.0±0.5
Capacitance at 120Hz (pF)	14000±30%
◆Max. Current Consumption (mA)	2
Operating Temperature(℃)	-20 ~ +60
Storage Temperature(℃)	-30 ~ +70
Weight(g)	2.1

◆ Value applying at rated voltage

DIMENSIONS :
(Unit: mm)

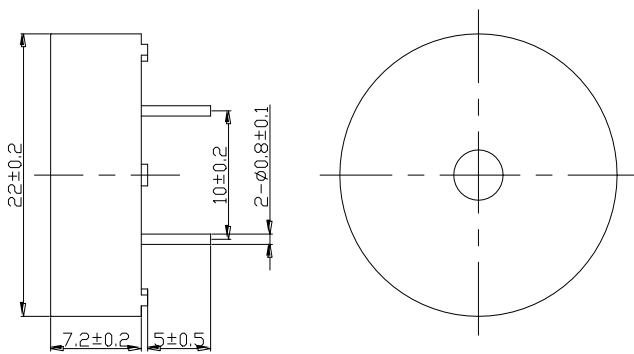

FREQUENCY RESPONSE:

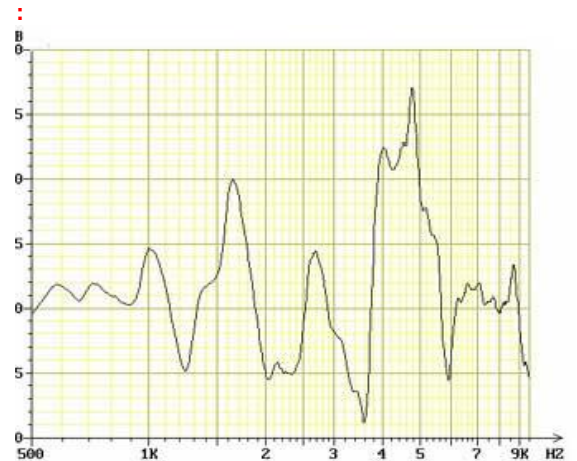

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbeco.kr