


PMB2226P

TYPE	PMB2226P
◆Min. Sound Pressure Level(dB)	80/2.0KHz;9Vp-p;square wave/10cm
Rated Voltage(Vp-p)	9Vp-p
Operating Voltage(Vp-p)	1 ~ 30Vp-p
Resonant frequency (KHz)	2.0±0.5
Capacitance at 120Hz (pF)	25000±30%
◆Max. Current Consumption(mA)	3.0
Operating Temperature(℃)	-20 ~ +100
Storage Temperature(℃)	-30 ~ +110
Weight(g)	2

◆ Value applying at rated voltage

DIMENSIONS :
(Unit: mm)

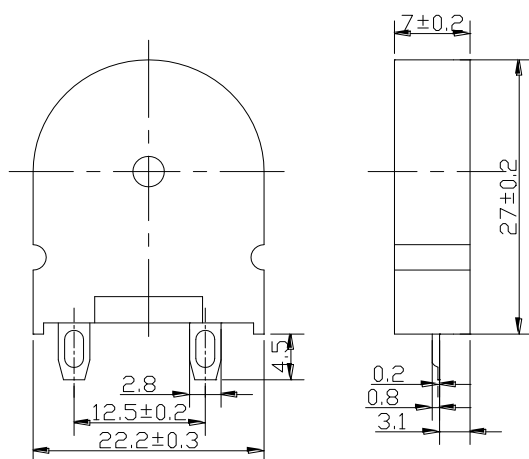

FREQUENCY RESPONSE:

