

# SPECIFICATION FOR APPROVAL

## 承 认 书

Description : Magnetic Buzzer

Vender's Part No. : \_\_\_\_\_

Customer's. Part No. : PMB360A

Serial No. : \_\_\_\_\_

Version No. : \_\_\_\_\_

CUSTOMER'S APPROVED SIGNATURE		

# PMB

상표등록 <제40-0729433호>

## 피 엠 비 일렉 텍

### PMB ELECTECH

서울시 구로구 경인로53가길 10 대명벨리온 904호

전화 : 02-2619-0388(대)

팩스 : 02-2619-0346

홈페이지 : [www.pmbe.co.kr](http://www.pmbe.co.kr)

e-mail : [pmbe@pmbe.co.kr](mailto:pmbe@pmbe.co.kr)


## PMB360A

<b>1、 Technical Parameter</b> Measuring condition Part shall be measured under a condition (Temperature: 5~35°C, Humidity: 45%~85%R.H., Atmospheric pressure: 860 ~1060hPa) unless the standard condition (Temperature: 25±3°C, Humidity: 60±10%R.H. Atmospheric pressure: 860 ~1060hPa) is regulated to measure.		
1	Rated Voltage	24VDC
2	Operating Voltage	9-48 VDC
3	Rated Current	Max.18mA, at 24VDC
4	Sound Output	Min100dB / at 10 cm, at 24VDC
5	Resonant Frequency	2800±500 Hz
6	Tone	Continuous
7	Operating Temperature	-20 - +70°C
8	Storage Temperature	-30 - +80°C
9	RoHS	Yes
10	Weight	Approx 17.5g

## 2、 Dimensions

Unit: mm

Tolerance: ±0.5mm Except Specified

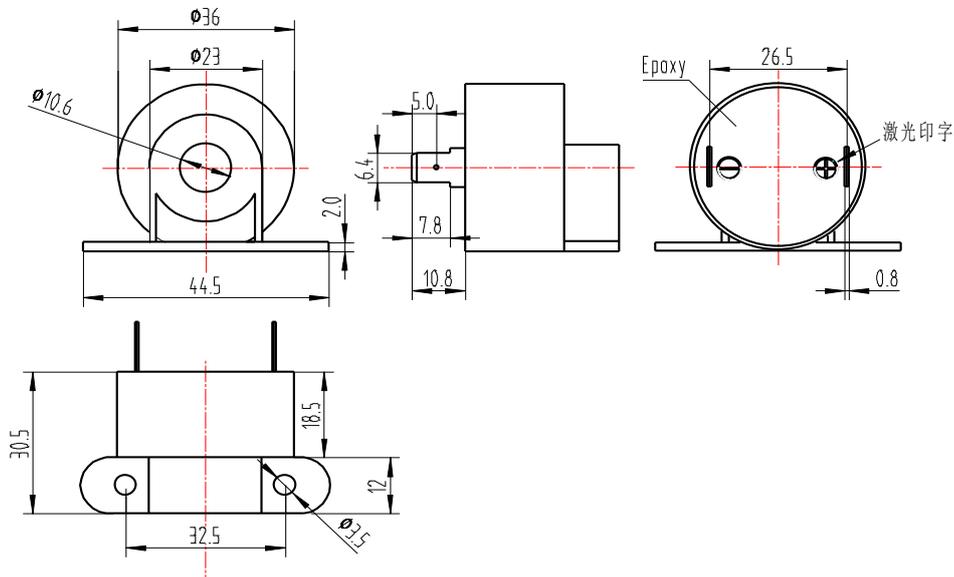

\*Housing Material: Black ABS

### 3 · Reliability Test

After any following tests the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall not deviate more than -10 dB from the initial value

#### 3.1 Ordinary Temperature Life Test

The part shall be subjected to 96 hours at  $25\pm 10^{\circ}\text{C}$ . Input rated voltage Resonant frequency, 1/2 duty Square wave.

#### 3.2 High Temperature Test

The part shall be capable of with standing a storage temperature of  $+80^{\circ}\text{C}$  for 96 hours.

#### 3.3 Low Temperature Test

The part shall be capable of with standing a storage temperature of  $-30^{\circ}\text{C}$  for 96 hours.

#### 3.4 Humidity Test

Temperature:  $+40^{\circ}\text{C}\pm 3^{\circ}\text{C}$  Relative Humidity: 90%~95% Duration: 48 hours and expose to room temperature for 6 hours

#### 3.5 Temperature Shock Test

Temperature:  $70^{\circ}\text{C}$  /1hour  $\rightarrow$   $25^{\circ}\text{C}$ /3hours  $\rightarrow$   $-30^{\circ}\text{C}$ /1hour  $\rightarrow$   $25^{\circ}\text{C}$ /3hours (1cycle)  
Total cycle: 10 cycles

#### 3.6 Drop Test

Standard Packaging From 75cm (Drop on hard wood or board of 5cm thick, three sides, six plain.)

#### 3.7 Vibration Test


Vibration: 1000cycles /min. Amplitude: 1.5mm, Duration: 1 hour in each 3 axes

#### Note:

As this product is not protected from foreign material entering, please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down) may occur if foreign material enter it.

### 4 · Electrical And Acoustical Measuring Condition

#### a) Recommended Setting

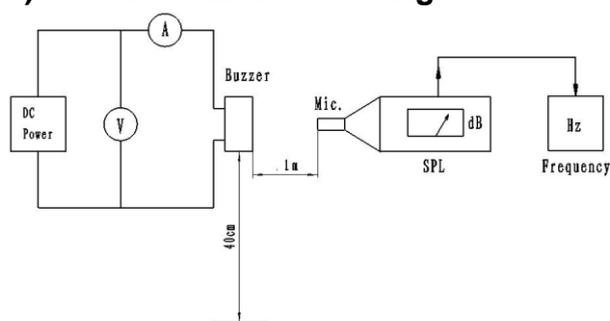

#### b) Recommended Test Circuit

